

Akustika 10 Baffle is simple but not simplistic.

Crafted exclusively of Akustika 10, this super sleek acoustic solution keeps the aesthetic muted while going big on sound absorption. Pick from customizable sizes to get just the right fit. And although suspension hardware is a necessity, it doesn't need to be the center of attention. Akustika 10 Baffle's multiple suspension and mounting options are minimal while also making installation a breeze.



Get Just the Right Fit

Choose customizable sizes with repositionable hardware to miss any and all ceiling obstructions.

Hardware Options Galore

Available with suspension cable, suspension rod, or ceiling mounted options. Plus, choose from three ceiling attachment options.


Soften Sound

Akustika 10 Baffle provides an NRC of 0.90 to provide plenty of sound softening.


Installation is a Breeze

Integrated hardware with adjustable cable grippers makes installation and leveling quick and über easy.



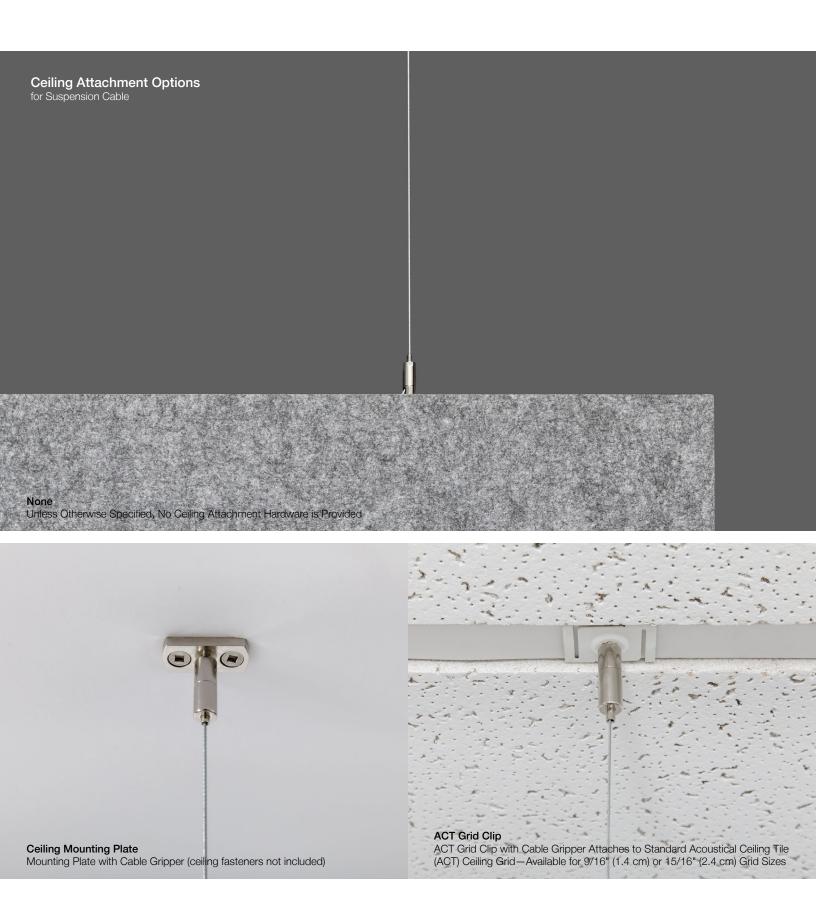


For details of suspension + ceiling attachment options, please contact FilzFelt Customer Service

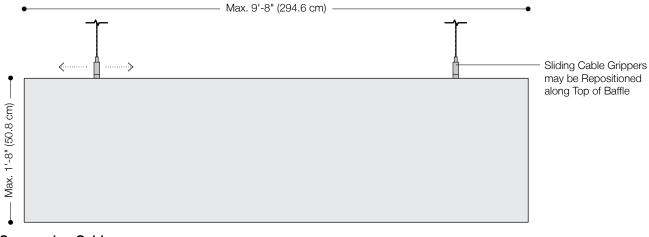


Suspension Cable

Front Elevation

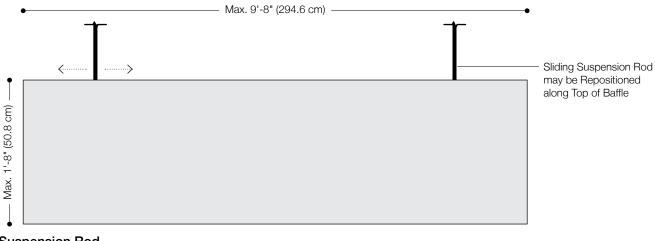

Suspension Rod

Front Elevation

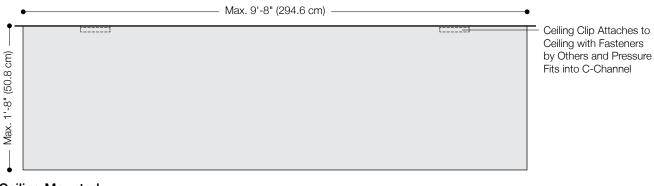

Ceiling MountedFront Elevation

Content	Product	Akustika 10 Baffle
Maximum: 1'-8' x 9'-8' (50.8 x 294.6 cm)	Content	Akustika 10 (60% post-consumer recycled content)
Suspension Options Suspension Rod Ceiling Attachment Options for Suspension Cable Suspension Points Two suspension points per panel Ceiling Attachment Options for Suspension Cable None Ceiling Mounting Plate ACT Grid Clip Custom Custom sizes are available and must be quoted Durability Contract Lead Time Made to order and certain lead times will apply Installation Install with two suspension drops included per baffle for suspended options or ceiling attachment hardware for ceiling mounted. Sliding cable grippers and suspension rods may be repositioned along track in top of panel and optional ceiling attachment options include ceiling mounting plate and ACT grid clips. Suspension cables or rods come in 3 -0" (91.4 cm) length and additional length is available for an upcharge. Actual ceiling connection depends upon ceiling type and ceiling fasteners not included. Unistrut Installation Suspension options may be suspended from Unistrut Metal Framing System provided by others. For more information, please contact FIE/Felt Customer Service. Maintenance Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Variation Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. Environmental Contains minimum 60% post-consumer recycled content and is 100% recyclable, no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED© Download Declare Label Living Bullcing Challenge Compliant Oeko-Tex® Standard 100 Certified Product Class II Meds VOC test limits for the CPDH v1.2 method Acoustics ASTM C 423: NRC – 0.90, SAA – 0.92 Colorfastness to Light	Panel Sizes	
Suspension Points Two suspension points per panel Ceiling Attachment Options for Suspension points per panel None Ceiling Mounting Plate ACT Grid Clip Custom Custom Sizes are available and must be quoted Durability Contract Lead Time Made to order and certain lead times will apply Install with two suspension drops included per baffle for suspended options or ceiling attachment hardware for ceiling mounted. Sliding cable grippers and suspension rods may be repositioned along track in top of panel and optional ceiling attachment options include ceiling mounting plate and ACT grid clips. Suspension cables or rods come in 3°-0° [91.4 cm) length and additional length is available for an upcharge. Actual ceiling connection depends upon ceiling type and ceiling fasteners not included. Unistrut Installation Suspension options may be suspended from Unistrut Metal Framing System provided by others. For more information, please contact FlizFeit Customer Service. Maintenance Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Variation Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. Environmental Contains minimum 60% post-consumer recycled content and is 100% recyclable, no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED® Download Declare Label Living Building Challenge Compliant Oeko-Tex® Standard 100 Certified Product Class II Meets VOC itset limits for the CDPH v1.2 method Acoustics ASTM C 423: NRC - 0.90, SAA - 0.92 Colorfastness to Light Class 5 (72 hours)	Thickness	1 11/16 in (42.6 mm)
Ceiling Attachment Options for Suspension Cable	Suspension Options	Suspension Rod
Custom Custom izes are available and must be quoted Durability Contract Lead Time Made to order and certain lead times will apply Installation Install with two suspension drops included per baffle for suspended options or ceiling attachment hardware for ceiling mounted. Sliding cable grippers and suspension rods may be repositioned along track in top of panel and optional ceiling attachment options include ceiling mounting plate and ACT grid clips. Suspension cables or rods come in 3'-0" (91.4 cm) length and additional length is available for an upcharge. Actual ceiling connection depends upon ceiling type and ceiling fasteners not included. Unistrut Installation Suspension options may be suspended from Unistrut Metal Framing System provided by others. For more information, please contact FlizFelt Customer Service. Maintenance Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Variation Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. Environmental Contains minimum 60% post-consumer recycled content and is 100% recyclable, no formaldehyde, 100% VOC free, no chemical initiants, and free of harmful substances Akustika 10 contributes to LEED® Download Declare Label Living Building Challenge Compliant Oeko-Tex® Standard 100 Certified Product Class II Meets VOC test limits for the CDPH v1.2 method Acoustics ASTM C 423: NRC − 0.90, SAA − 0.92 Colorfastness to Light Class 5 (72 hours)	Suspension Points	Two suspension points per panel
Durability Contract Lead Time Made to order and certain lead times will apply Installation Install with two suspension drops included per baffle for suspended options or ceiling attachment hardware for ceiling mounted. Sliding cable grippers and suspension rods may be repositioned along track in top of panel and optional ceiling attachment options include ceiling mounting plate and ACT grid clips. Suspension cables or rods come in 3°-0° (91.4 cm) length and additional length is available for an upcharge. Actual ceiling connection depends upon ceiling type and ceiling fasteners not included. Unistrut Installation Suspension options may be suspended from Unistrut Metal Framing System provided by others. For more information, please contact FilzFelt Customer Service. Maintenance Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Variation Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. Environmental Contains minimum 60% post-consumer recycled content and is 100% recyclable, no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED® Download Declare Label Living Building Challenge Compliant Oeko-Tex® Standard 100 Certified Product Class II Meets VOC test limits for the CDPH v1.2 method Acoustics		Ceiling Mounting Plate
Lead Time Made to order and certain lead times will apply	Custom	Custom sizes are available and must be quoted
Installation Install with two suspension drops included per baffle for suspended options or ceiling attachment hardware for ceiling mounted. Sliding cable grippers and suspension rods may be repositioned along track in top of panel and optional ceiling attachment options include ceiling mounting plate and ACT grid clips. Suspension cables or rods come in 3'-0" (91.4 cm) length and additional length is available for an upcharge. Actual ceiling connection depends upon ceiling type and ceiling fasteners not included. Unistrut Installation Suspension options may be suspended from Unistrut Metal Framing System provided by others. For more information, please contact FilzFelt Customer Service. Maintenance Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Variation Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. Environmental Contains minimum 60% post-consumer recycled content and is 100% recyclable, no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED® Download Declare Label Living Building Challenge Compliant Oeko-Tex® Standard 100 Certified Product Class II Meets VOC test limits for the CDPH v1.2 method Acoustics ASTM C 423: NRC – 0.90, SAA – 0.92 Colorfastness to Light Class 5 (72 hours)	Durability	Contract
hardware for ceiling mounted. Sliding cable grippers and suspension rods may be repositioned along track in top of panel and optional ceiling attachment options include ceiling mounting plate and ACT grid clips. Suspension cables or rods come in 3'-0" (91.4 cm) length and additional length is available for an upcharge. Actual ceiling connection depends upon ceiling type and ceiling fasteners not included. Unistrut Installation Suspension options may be suspended from Unistrut Metal Framing System provided by others. For more information, please contact FilzFelt Customer Service. Maintenance Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Variation Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. Environmental Contains minimum 60% post-consumer recycled content and is 100% recyclable, no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED© Download Declare Label Living Building Challenge Compliant Oeko-Tex® Standard 100 Certified Product Class II Meets VOC test limits for the CDPH v1.2 method Acoustics ASTM C 423: NRC – 0.90, SAA – 0.92 Colorfastness to Light Class 5 (72 hours)	Lead Time	Made to order and certain lead times will apply
Maintenance Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Variation Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. Environmental Contains minimum 60% post-consumer recycled content and is 100% recyclable, no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED® Download Declare Label Living Building Challenge Compliant Oeko-Tex® Standard 100 Certified Product Class II Meets VOC test limits for the CDPH v1.2 method Acoustics ASTM C 423: NRC – 0.90, SAA – 0.92 Colorfastness to Light Class 5 (72 hours)	Installation	hardware for ceiling mounted. Sliding cable grippers and suspension rods may be repositioned along track in top of panel and optional ceiling attachment options include ceiling mounting plate and ACT grid clips. Suspension cables or rods come in 3'-0" (91.4 cm) length and additional length is available for an
and lukewarm water. Variation Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. Environmental Contains minimum 60% post-consumer recycled content and is 100% recyclable, no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED© Download Declare Label Living Building Challenge Compliant Oeko-Tex© Standard 100 Certified Product Class II Meets VOC test limits for the CDPH v1.2 method Acoustics ASTM C 423: NRC – 0.90, SAA – 0.92 Colorfastness to Light Class 5 (72 hours)	Unistrut Installation	
as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. Environmental Contains minimum 60% post-consumer recycled content and is 100% recyclable, no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED® Download Declare Label Living Building Challenge Compliant Oeko-Tex® Standard 100 Certified Product Class II Meets VOC test limits for the CDPH v1.2 method Acoustics ASTM C 423: NRC – 0.90, SAA – 0.92 Colorfastness to Light Class 5 (72 hours)	Maintenance	
100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED© Download Declare Label Living Building Challenge Compliant Oeko-Tex® Standard 100 Certified Product Class II Meets VOC test limits for the CDPH v1.2 method Acoustics ASTM C 423: NRC – 0.90, SAA – 0.92 Colorfastness to Light Class 5 (72 hours)	Variation	as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced
Colorfastness to Light Class 5 (72 hours)	Environmental	100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED© Download Declare Label Living Building Challenge Compliant Oeko-Tex© Standard 100 Certified Product Class II
	Acoustics	ASTM C 423: NRC – 0.90, SAA – 0.92
Flammability Test reports available upon request	Colorfastness to Light	Class 5 (72 hours)
	Flammability	Test reports available upon request

Standard Colors







05 Ice 02 Medium Grey

