Akustika 25 Suspended Acoustic Ceiling Panel



TREASER NAMENNE



Akustika 25 Suspended comes in all shapes and sizes. Akustika 25 Suspended is a customizable acoustic panel system with 100% Wool Design Felt flush-mounted to one side and provides a hefty Noise Reduction Coefficient (NRC) rating of 0.85. These panels composed of recycled content are available in over ninety colors of 100% Wool Design Felt and ship complete with two options of repositionable standard suspension hardware that allow for easy installation.





Akustika 25 Suspended with Exposed Edge

Get Just the Right Fit

Choose customizable sizes with repositionable hardware to miss any and all ceiling obstructions.

Hardware Options Galore

Available with suspension cable or suspension rod options. Plus, choose from three ceiling attachment options.

Go With Show or No

Choose from Covered or Exposed Edges in your choice of three substrate colors.

Soften Sound

Akustika 25 Suspended provides an NRC of 0.85 to provide plenty of sound softening.


Think Outside of the Box

Go with rectangular shapes and ninety-degree corners or specify custom shapes and curves a plenty.

Installation is a Breeze


Integrated hardware with adjustable cable grippers makes installation and leveling quick and über easy.



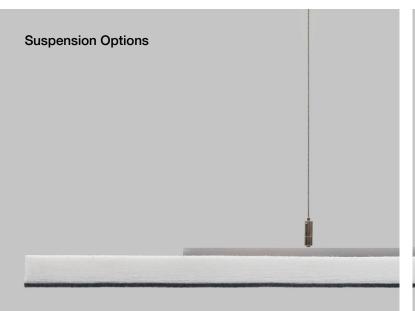

Suspension Cable with Sliding Cable Gripper

Suspension Rod

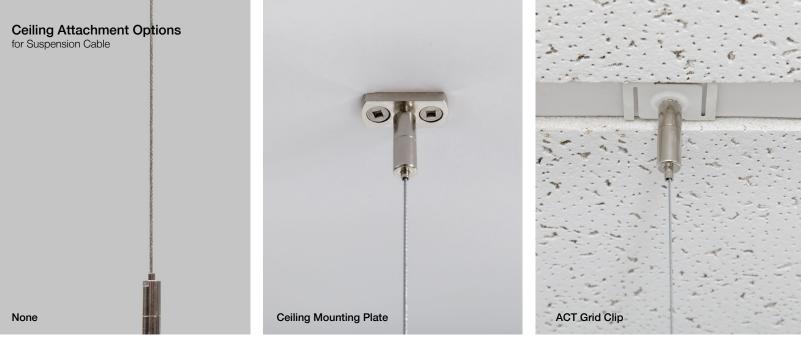

No Ceiling Attachment Hardware Provided Unless Otherwise Specified

Ceiling Mounting Plate includes Mounting Plate with Cable Gripper (ceiling fasteners not included)

ACT Grid Clip with Cable Gripper Attaches to Standard Acoustical Ceiling Tile (ACT) Ceiling Grid—Available for 9/16" (1.4 cm) or 15/16" (2.4 cm) Grid Sizes

For details of suspension + ceiling attachment options, please contact FilzFelt Customer Service



Product	Akustika 25 Suspended				
Content	100% Wool Design Felt + Akustika 25 Substrate (60% pre-consumer recycled content)				
Panel Sizes	Minimum: 1 sq ft (0.09 sq m) Maximum: 4'-0" x 8'-0" (121.9 x 243.8 cm)				
Thickness	1 1/8 in (28 mm)				
Edge Options	Exposed Covered				
Suspension Options	Suspension Cable Suspension Rod				
Suspension Points	Four to six suspension points per panel				
Ceiling Attachment Options for Suspension Cable	None Ceiling Mounting Plate ACT Grid Clip				
Custom	Custom sizes and shapes are available and must be quoted				
Durability	Contract				
Lead Time	Made to order and certain lead times will apply				
Installation	Installs with four to six suspension drops included per panel with suspension cables + sliding cable grippers or sliding suspension rods. Sliding cable grippers and suspension rods may be repositioned along track in top of panel and optional ceiling attachment options include ceiling mounting plate and ACT grid clips. Suspension cables or rods come in 3'-0" (91.4 cm) length and additional length is available for an upcharge. Actual ceiling connection depends upon ceiling type and ceiling fasteners not included.				
Unistrut Installation	Suspension options may be suspended from Unistrut Metal Framing System provided by others. For more information, please contact FilzFelt Customer Service.				
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the surface appearance of the felt. Refer to Product Maintenance and Cleaning Guide for detailed care instructions.				
Variation	Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.				
Environmental	100% Wool Design Felt is 100% biodegradable/compostable and Akustika 25 contains minimum 60% pre-consumer recycled content and is 100% recyclable Contains no formaldehyde, no chemical irritants, and free of harmful substances 100% Wool Design Felt and Akustika 25 contribute to LEED© Download Declare Label Living Building Challenge Criteria Compliant Oeko-Tex© Standard 100 Certified Product Class II (100% Wool Design Felt) Meets VOC test limits for the CDPH v1.2 method				
Acoustics	ASTM C 423: NRC – 0.85, SAA – 0.85				
Colorfastness to Light	Class 4–5 (40 hours)				
Colorfastness to Crocking	Class 3–4 (wet), Class 4–5 (dry)				
Flammability	Test reports available upon request				



Standard Colors

100% Wool Design Felt

100% 00001	Design Feil						
487 Pfirsich	023 Koralle	945 Drachenfrucht	221 Himbeere	136 Weinrot	209 Bordeaux	102 Kirsche	201 Rot
125 Tomate	179 Hellrot	180 Terracotta	173 Mango	105 Rost	573 Kupfer	116 Orange	495 Abricot
124 Gelb	131 Honig	509 Kamel	550 Ocker	274 Senf	108 Zitrone	403 Mais	535 Sesam
203 Vanille	027 Kartause	384 Lind	713 Kiwi	377 Maigrün	732 Farn	378 Oliv	260 Sprießen
343 D'Grün	435 Smaragd	625 Pinie	248 Jade	472 Minze	575 Salbei	483 Adria	548 Türkis
312 Lagune	345 Pazifik	308 Petrol	698 Dunst	405 Stahl	215 Meer	540 Ozean	533 Indigo
282 D'Blau	111 Traube	626 Azur	647 Kobalt	686 Enzian	272 Royal	286 H'Blau	995 Wasser
458 Bewölkt	284 Himmel	613 Gletscher	551 Eis	113 Immergrün	099 Lila	667 Amethyst	269 Violett
242 Pink	640 Granat	634 Erröten	671 Pfingstrose	255 Flieder	437 Aubergine	250 Trüffelbraun	220 Rehbraun
411 Alpaka	190 Natur-meliert	200 Natur	331 Sahara	311 Mandel	467 Sand	481 Sandstein	100 Wollweiß
110 Rohweiß	160 Beige	529 Champagner	150 Weiß	428 Silber	427 Stein	021 Beton	170 Asche
423 Hellgrau	408 Taupe	175 Graphit	425 Taubengrau	446 Kohle	300 Anthrazit	426 Schwarz	
5			5				

Akustika 25 Substrate

01 White

