

Index Linear

Acoustic Wall Tile





Index Linear goes the distance.


Thick, sound-softening wool felt and natural cork composite come together in Index Linear—a seamless, plank-style wallcovering that adds linear emphasis to any space. Tiles are available in 2 in (5 cm), 4 in (10.2 cm), 6 in (15.2 cm), 8 in (20.3 cm), 10 in (25.4 cm), and 12 in (30.5 cm) widths in alternating thickness of 1/4 in (6 mm) and 5/16 in (8 mm). Each order includes equal numbers of six pattern elements that install easily with heavy-duty wallcovering adhesive.

Index Linear was designed by Submaterial, a design studio and manufacturer based in Albuquerque, New Mexico.



“With many of the surfaces and textures I explore, I believe I am striving to create a balance between simple geometries and complex natural systems. I have always been fascinated by the appearance of randomness, especially when it turns out to be driven by a complex and quite orderly set of rules.”

– David Hamlin with Submaterial, designer of Index Linear

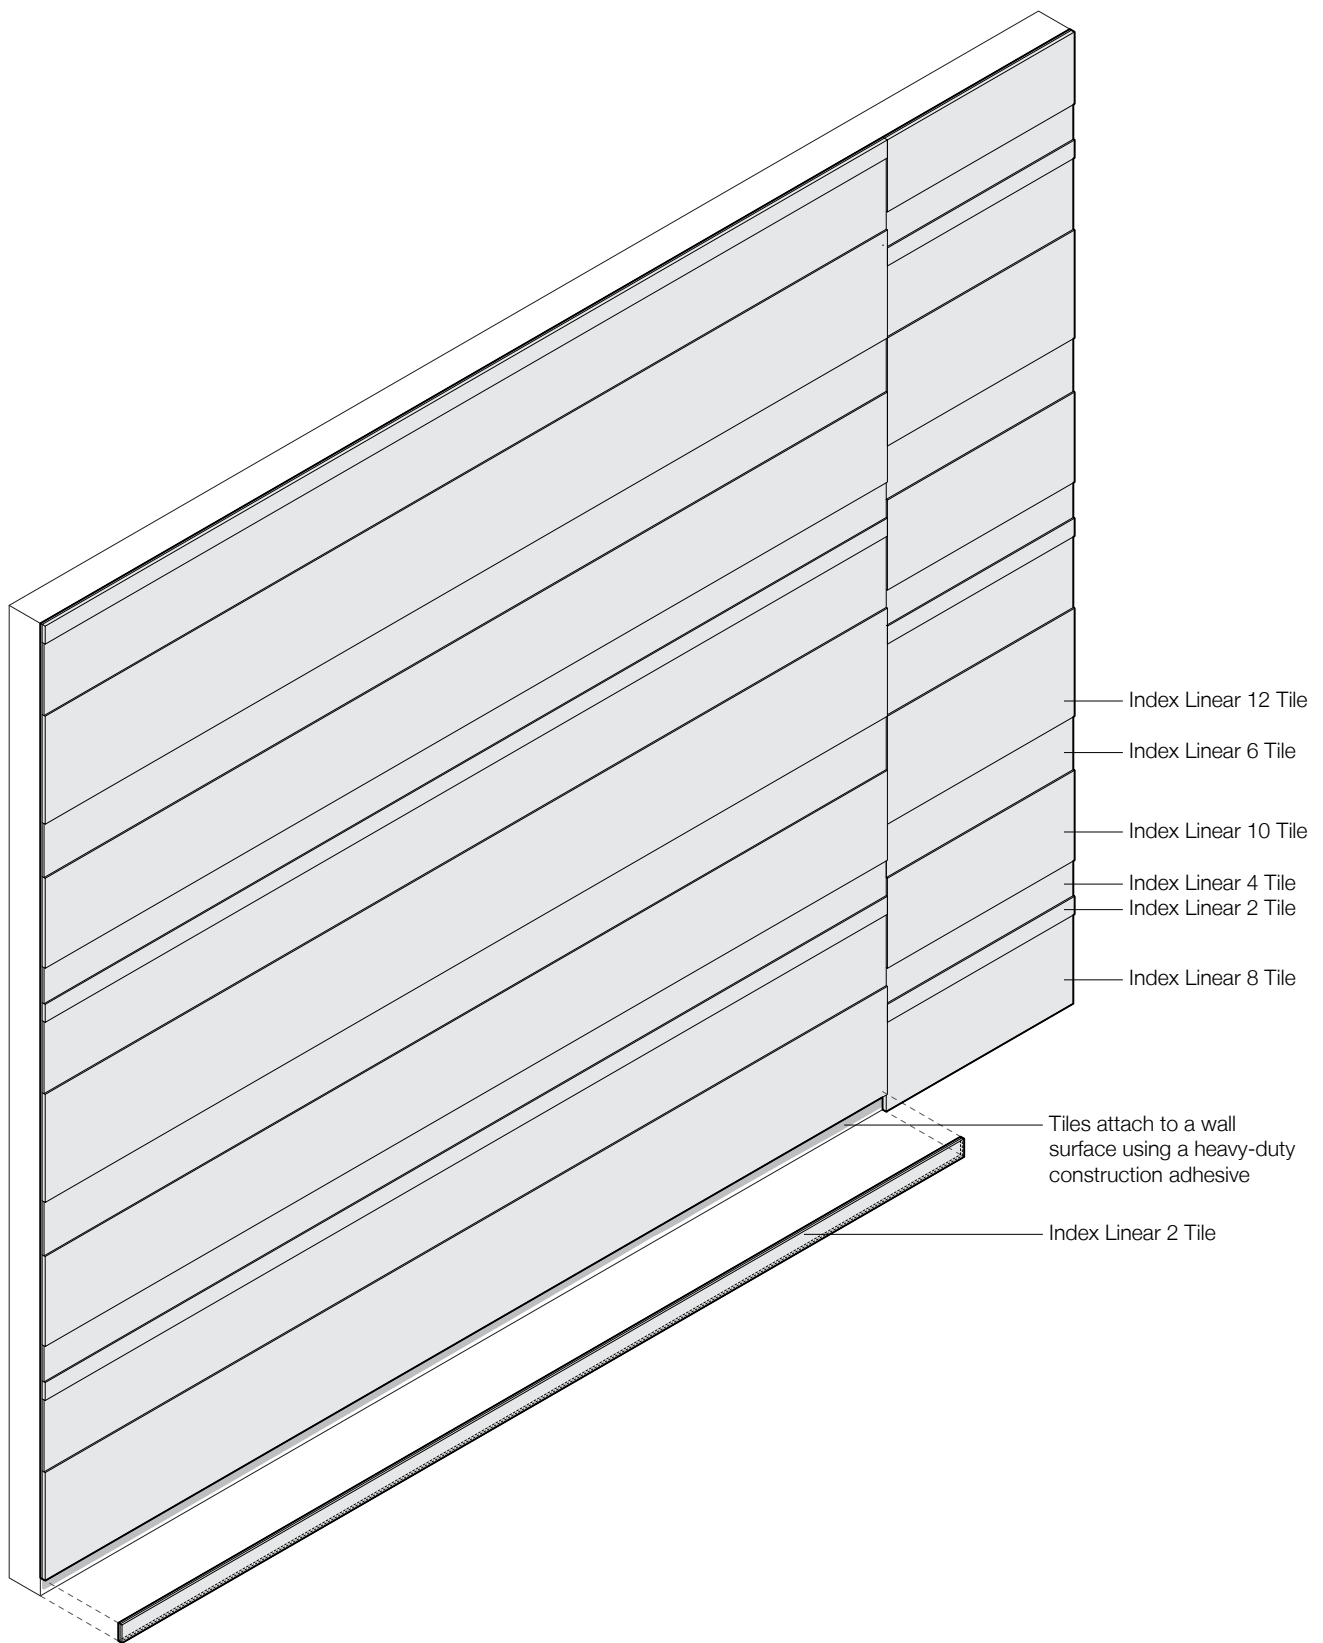


Exploded Axonometric
Six Distinct Tiles in Standard Pattern




Horizontal Pattern 1

Code: FF-SU-INDL-001

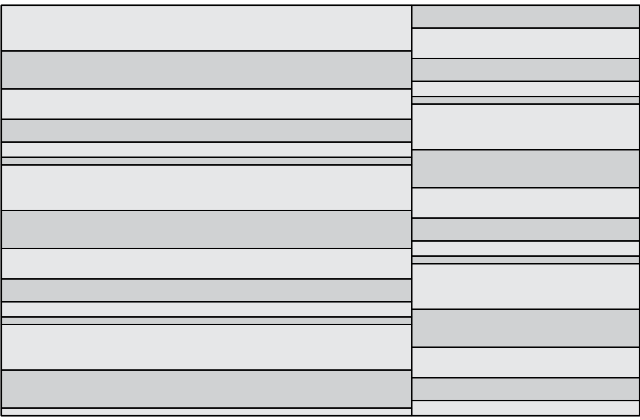

Horizontal Pattern 2

Code: FF-SU-INDL-003

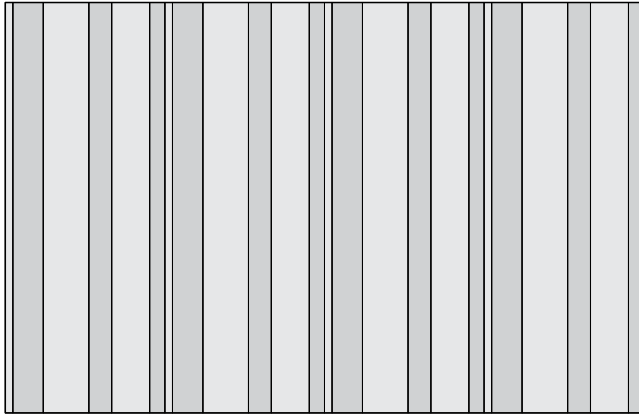

Vertical Pattern 1

Code: FF-SU-INDL-002



Vertical Pattern 2

Code: FF-SU-INDL-004

Patterns are shown as suggested installations and may be configured with any combination of FilzFelt colors.

| | |
|----------------------------------|---|
| Product | Index Linear |
| Designer | Submaterial |
| Content | 100% Wool Design Felt + Cork Composite Backing |
| Tile Sizes | 2: 2" x 9'-0" (5.1 cm x 2.7 m) 4: 4" x 9'-0" (10.2 cm x 2.7 m) 6: 6" x 9'-0" (15.2 cm x 2.7 m) 8: 8" x 9'-0" (20.3 cm x 2.7 m) 10: 10" x 9'-0" (25.4 cm x 2.7 m) 12: 1'-0" x 9'-0" (30.5 cm x 2.7 m) |
| Thickness | 1/4–5/16 in (6–8 mm) |
| Color Options | 1-Color or 2-Color per wall |
| Trim Options | End-of-Run Trim Outside Corner Trim |
| Custom | Tile sizes greater or less than 9'-0" (2.7 m) require an upcharge and must be quoted 3-Color or more per wall is available and must be quoted Akustika backing available to achieve NRC rating of 0.50 |
| Durability | Contract or residential |
| Lead Time | With the exception of Stocking Program Colors, tiles are made to order and certain lead times will apply |
| Installation | Each order is equally divided into six different tile heights: 2", 4", 6", 8", 10" and 12" (5 cm, 10.2 cm, 15.2 cm, 20.3 cm, 25.4 cm, and 30.5 cm). 50% will be 1/4 in (8 mm) thick tiles and 50% will be 5/16 in (8 mm) thick tiles. This is to encourage a random, rather than symmetrical patterned effect to the installation. Tiles attach to a wall surface using a heavy-duty wallcovering adhesive. IMPORTANT: Tiles will be oversized by 2 in (5 cm) in length to accommodate field conditions and must be trimmed to size with a utility knife. Refer to Index Linear Installation Instructions for complete guidance. |
| Maintenance | Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the surface appearance of the felt. Refer to Product Maintenance + Cleaning for detailed care instructions. |
| Variation | Wool felt is a natural material and color variation and inclusions of natural fiber on the surface are evidence of the 100% natural origin of the material. Since Imprint is constructed with felt strips turned on edge, color variation will be more extreme and is part of the design intent of the product. Shade variation will be very noticeable on the installed product and cannot be more uniform. |
| Environmental | 100% Wool Design Felt is 100% biodegradable/compostable and Cork Composite Backing is 93% pre-consumer recycled content Contains no formaldehyde, low VOC, no chemical irritants, and free of harmful substances Contributes to LEED® Download Declare Label Living Building Challenge Criteria Compliant Oeko-Tex® Standard 100 Certified Product Class II (100% Wool Design Felt) Forest Stewardship Council® Certified (Cork Composite Backing) Meets VOC test limits for the CDPH v1.2 method |
| Acoustics | Standard Cork Backing: ASTM C 423: NRC – 0.20, SAA – 0.21 Custom Akustika Backing: ASTM C 423: NRC – 0.50, SAA – 0.51 |
| Colorfastness to Light | Class 4–5 (40 hours) |
| Colorfastness to Crocking | Class 3–4 (wet), Class 4–5 (dry) |
| Flammability | Test reports available upon request |

Standard Colors

| | | | | | | | |
|---|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |  |
| 487 Pfirsich | 023 Koralle | 945 Drachenfrucht | 221 Himbeere | 136 Weinrot | 209 Bordeaux | 102 Kirsche | 201 Rot |
|  |  |  |  |  |  |  |  |
| 125 Tomate | 179 Hellrot | 180 Terracotta | 173 Mango | 105 Rost | 573 Kupfer | 116 Orange | 495 Abricot |
|  |  |  |  |  |  |  |  |
| 124 Gelb | 131 Honig | 509 Kamel | 550 Ocker | 274 Senf | 108 Zitrone | 403 Mais | 535 Sesam |
|  |  |  |  |  |  |  |  |
| 203 Vanille | 027 Kartause | 384 Lind | 713 Kiwi | 377 Maigrün | 732 Farn | 378 Oliv | 260 Sprießen |
|  |  |  |  |  |  |  |  |
| 343 D'Grün | 435 Smaragd | 625 Pinie | 248 Jade | 472 Minze | 575 Salbei | 483 Adria | 548 Türkis |
|  |  |  |  |  |  |  |  |
| 312 Lagune | 345 Pazifik | 308 Petrol | 698 Dunst | 405 Stahl | 215 Meer | 540 Ozean | 533 Indigo |
|  |  |  |  |  |  |  |  |
| 282 D'Blau | 111 Traube | 626 Azur | 647 Kobalt | 686 Enzian | 272 Royal | 286 H'Blau | 995 Wasser |
|  |  |  |  |  |  |  |  |
| 458 Bewölkt | 284 Himmel | 613 Gletscher | 551 Eis | 113 Immergrün | 099 Lila | 667 Amethyst | 269 Violett |
|  |  |  |  |  |  |  |  |
| 242 Pink | 640 Granat | 634 Erröten | 671 Pfingstrose | 255 Flieder | 437 Aubergine | 250 Trüffelbraun | 220 Rehbraun |
|  |  |  |  |  |  |  |  |
| 411 Alpaka | 190 Natur-meliert | 200 Natur | 331 Sahara | 311 Mandel | 467 Sand | 481 Sandstein | 100 Wolweiß |
|  |  |  |  |  |  |  |  |
| 110 Rohweiß | 160 Beige | 529 Champagner | 150 Weiß | 428 Silber | 427 Stein | 021 Beton | 170 Asche |
|  |  |  |  |  |  |  | |
| 423 Hellgrau | 408 Taupe | 175 Graphit | 425 Taubengrau | 446 Kohle | 300 Anthrazit | 426 Schwarz | |