


ARO Grid 4 works its sound softening magic by playing the angles.

This versatile and variable system uses angles in width and height to create a more open ceiling with modules that can be repeated and rotated. Play with colors and rotations to create patterning as distinct as this ceiling system. But as complex as the patterning may be, the installation is as straightforward as it gets with no hardware or tools.


ARO Grid was designed by Architecture Research Office (ARO), a New York based firm dedicated to architecture that unites beauty and form with strategy and intelligence.



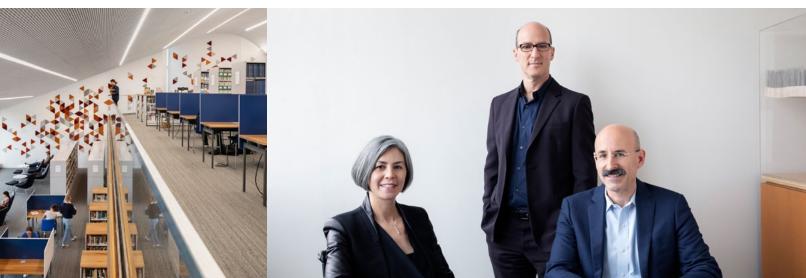


"We strive to convey a sense of calm, warmth, and joy in our product designs as well as through the architecture we design. We take inspiration from both material expression and functionality. We work to elevate spaces through careful attention to detail and use, and to emphasize the responsible use of materials and seek to balance beauty and strategy through design, pattern and texture."


- Architecture Research Office, designers of ARO Grid 4

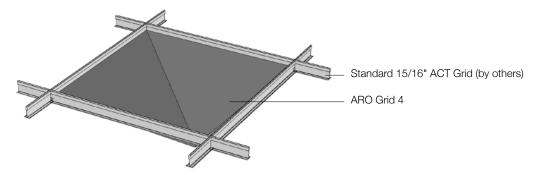


Perspective View

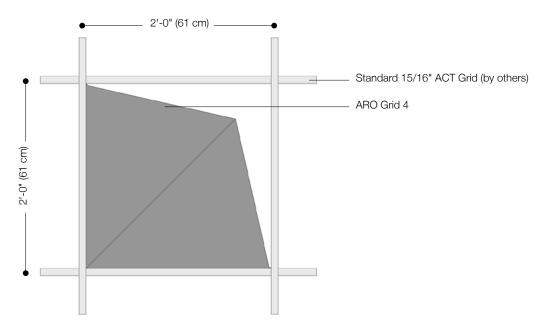


Reflected Ceiling Plan





Front Elevation

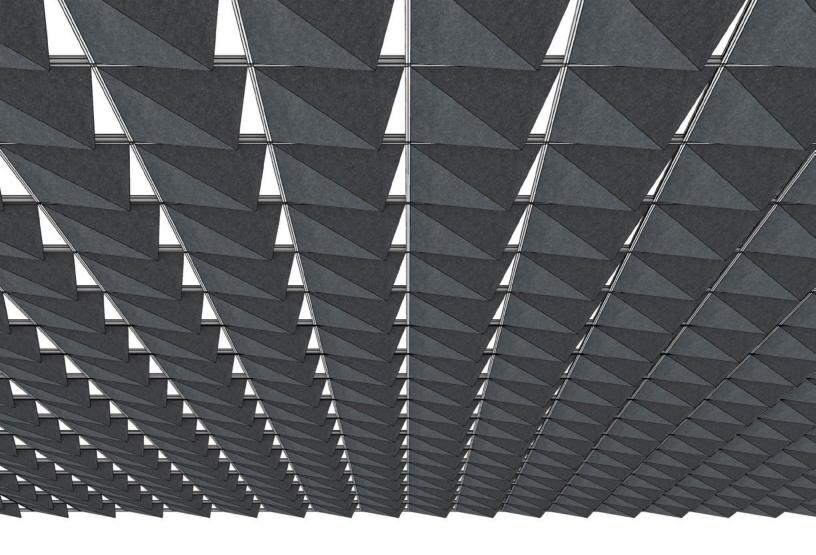





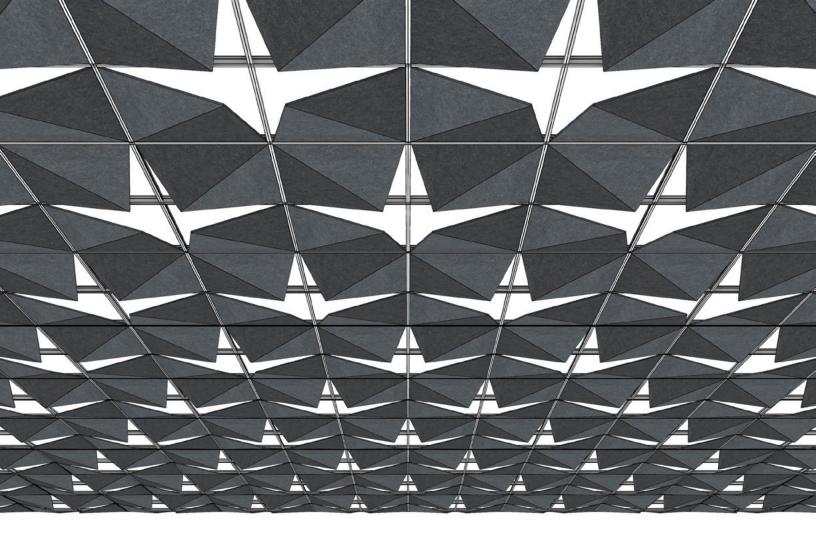







Suggested Pattern 4.2
Rotated 0° (A), 90° (B), 180° (C), 270° (D) in 1-Color




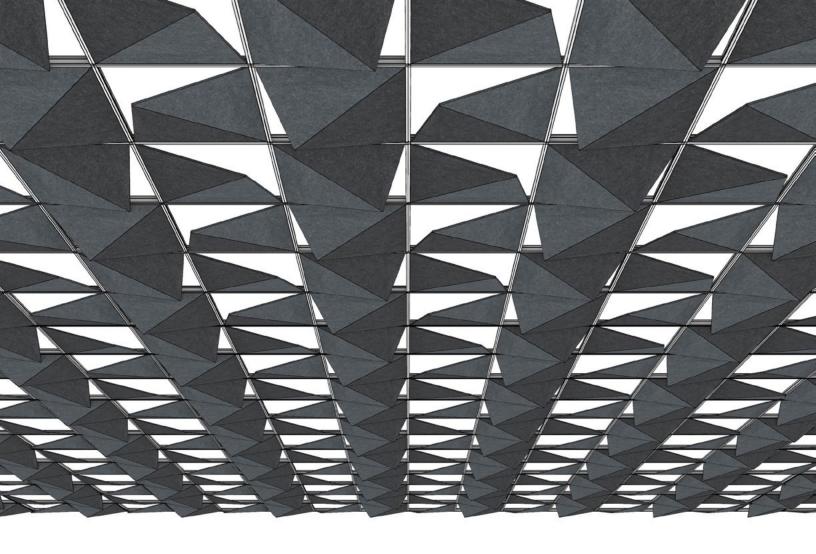






Suggested Pattern 4.3
Rotated 0° (A), 90° (B), 180° (C), 270° (D) in 1-Color

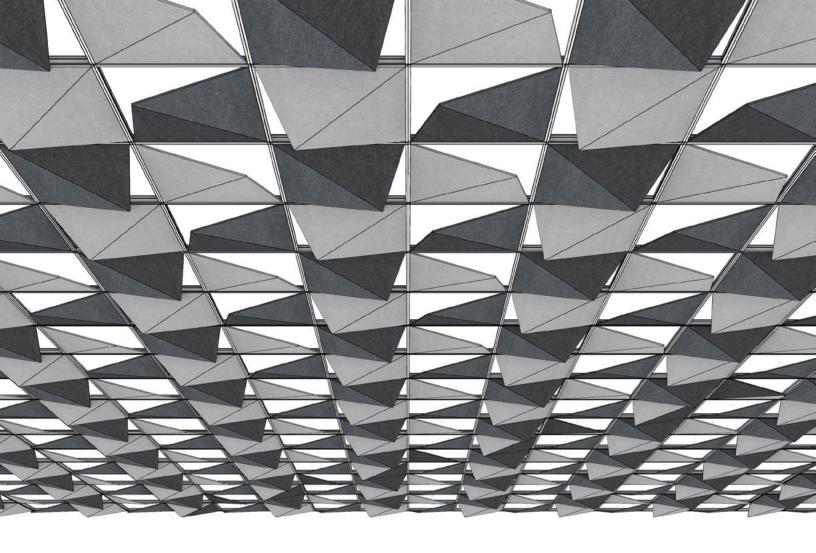





Suggested Pattern 4.4
Rotated 0° (A), 90° (B), 180° (C), 270° (D) in 2-Color

Product	ARO Grid 4
Designer	Architecture Research Office
Content	Akustika 10 (60% post-consumer recycled content)
Standard Size	2'-0" x 2'-0" x 4 1/2" (61.0 x 61.0 x 11.4 cm)
Color Options	1-Color or 2-Color per ceiling
Open Area	17.3%
Custom	Custom heights are available and must be quoted
Lead Time	Made to order and certain lead times will apply
Installation	Fit in standard 2x2 ACT suspended ceiling grid. Refer to ARO Grid 4 installation instructions for complete guidance.
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.
Variation	Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances Akustika 10 contributes to LEED© Download Declare Label Living Building Challenge Compliant Oeko-Tex© Standard 100 Certified Product Class II Meets VOC test limits for the CDPH v1.2 method
Acoustics	ASTM C 423: NRC – 0.80, SAA – 0.78
Colorfastness to Light	Class 5 (72 hours)
Flammability	Test reports available upon request

Standard Colors







02 Medium Grey 05 Ice

03 Dark Grey