

Akustika 10 Wall Installation Instructions

Interlock Mounting System Attachment

These installation recommendations consist of common-sense practices for installing wall panels and similar products. Installers should rely upon their own professional experience and understanding of their unique requirements to be the best guide to a successful installation.

Tools Needed

Bar level or laser level
Carpenter's square
Drill
Stiff putty knife
Tape measure
Utility knife or oscillating multi-tool with a fine tooth blade (80 plus tooth)
Wall screws appropriate for wall type (not included)



Components

Panels with Interlock male mounts (as ordered)
Strapping with Interlock female mounts
Strapping Map + Shop Drawing

Installation Instructions

- 1 Handle the panels keeping the felt faces together and the substrate faces together to reduce the possibility of damage during installation.
- 2 Inspect the panels. In the case of product defect or damage in transit, FilzFelt must be notified within five (5) business days. FilzFelt cannot accept a return or warranty claim on any material that has been installed.
- 3 Allow components to acclimate to the installation environment. After the shipping crates have been opened, the Panels should be laid out individually on the floor for at least forty-eight (48) hours.
- 4 While the panels are becoming acclimatized, clean the work surface. It should be smooth, dry, and dust-free to allow the best possible installation. A Level 4 Finish wall preparation is sufficient.
- 5 The Strapping and Panels provided have designations carved into them that indicate the placements shown on the Strapping Map and Shop Drawing. Review the maps and organize the Strapping and Panels accordingly before installing.
- 6 Using wall screws appropriate for the wall type (not included), secure the Strapping to the wall as indicated on the Strapping Map. **IMPORTANT:** Make sure that Strapping pieces are plumb and level as the installation progresses.
- 7 Use the Shop Drawing as a guide for the Panel placement. To attach a Panel, align the male Interlock mounts on the Panels to the corresponding female Interlock mounts in the Strapping and press into place until they snap in.
- 8 To detach a Panel, slide a stiff putty knife behind the Panel at each Interlock mount and gently pry and pull the Panel away from the Strapping until it pops off.
- 9 Starting in the lower left, install the bottom horizontal row of Panels from left-to-right.
- 10 Continue row-by-row going left-to-right, each time starting at the left and working right in that row until all Panels are installed, per the Shop Drawing.
- 11 To cut device cut-outs, use a sharp utility knife and carpenter's square or oscillating multi-tool with fine tooth blade. If cutting with a utility knife, make a first pass with light pressure to score the felt. Next, make one (1) to two (2) additional passes using firm pressure and making sure the blade is plumb. **IMPORTANT:** Always use a sharp blade and change blades frequently.

Devices may then be either wall-mounted or panel-mounted as specified by the client. All cutting and finishing of the cut-outs and installation of electrical devices are the responsibility of the purchaser.

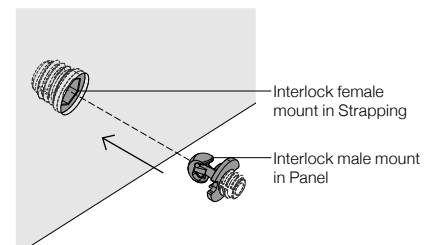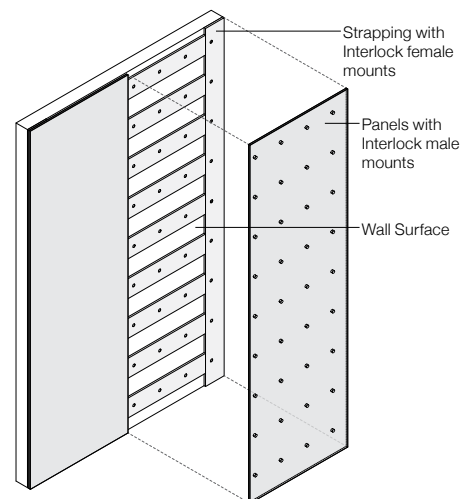

7

Align male mounts in Panels with female mounts in Strapping and push in until they snap

Cleaning Instructions

Like any natural fiber, a minimal approach should always be taken to clean wool felt since the cleaning method could potentially do more harm than the soiling or stain. The cleaning approach should be (1) dust with a lint roller, (2) vacuum with a clean, soft brush, (3) clean with water and mild detergent, and (4) clean with chemical spot remover. **IMPORTANT:** Always test any cleaning method in an inconspicuous area before attempting general cleaning.

For complete instructions, refer to the Product Maintenance + Cleaning Guide at filzfelt.com/cleaning-guide.