


Figure No. 4 is ahead of the curve.

Figure No. 4 is ahead of the curve with its repeated quarter round sections in alternating felt thickness. This tile-based wallcovering system uses positive and negative versions of sinuous lines to create graphic, organic patterns and tactile dimension. The composite cork-backed tiles are covered in varied thicknesses of felt to create depth and shadow. Choose one color to keep the patterning subtle or play up the dimensionality with up to four colors per wall.


Figure No. 4 was designed by Submaterial, a design studio and manufacturer based in Albuquerque, New Mexico.



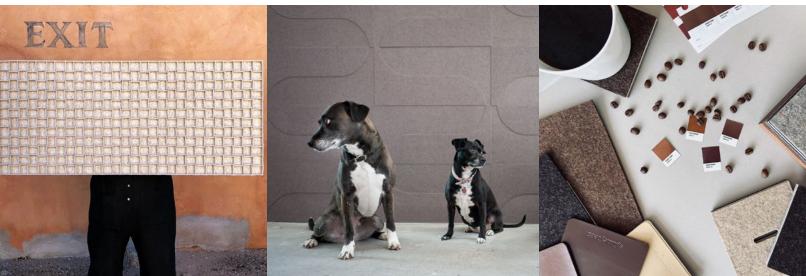


"With many of the surfaces and textures I explore, I believe I am striving to create a balance between simple geometries and complex natural systems. I have always been fascinated by the appearance of randomness, especially when it turns out to be driven by a complex and quite orderly set of rules."


- David Hamlin with Submaterial, designer of Figure No. 4

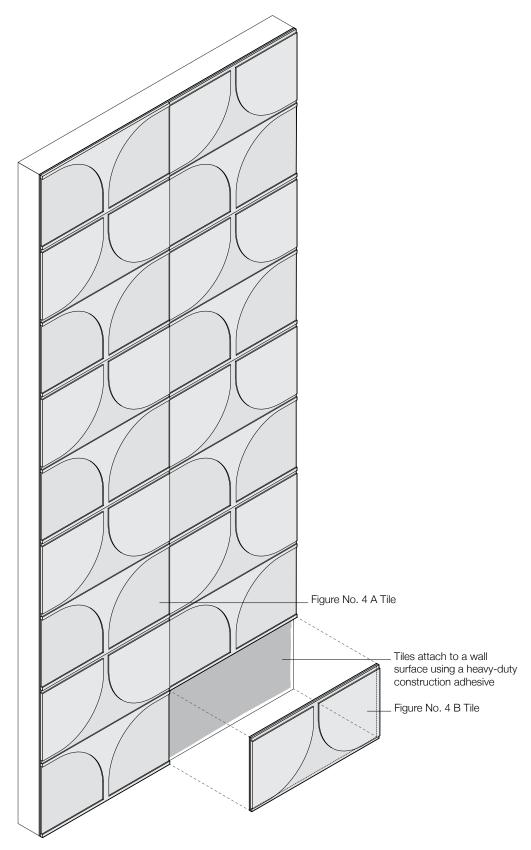

**Exploded Axonometric** Two Distinct Tiles in Standard Pattern

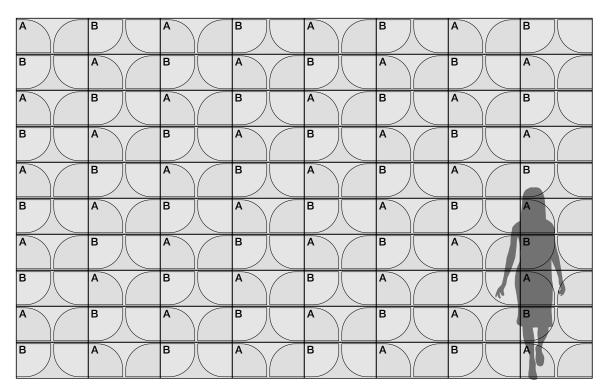

## Standard Pattern



**Standard Tiles**Two Distinct Tiles in Standard Pattern

Product	Figure No. 4
Designer	Submaterial
Content	100% Wool Design Felt + Cork Composite Backing
Tile Size	2'-0" x 1'-0" (61 x 30.5 cm)
Thickness	1/4–5/16 in (6–8 mm)
Color Options	1-Color or 2-Color per wall
Trim Option	End-of-Run Trim
Custom	3-Color or more per wall is available must be quoted Akustika backing available to achieve NRC rating of 0.50
Durability	Contract or residential
Lead Time	Made to order and certain lead times will apply
Installation	Each order includes four distinct tiles that install according to one standard pattern and attach to a wall surface using a heavy-duty wallcovering adhesive. Tiles may be trimmed to size with a utility knife. Refer to installation instructions for complete guidance.
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the surface appearance of the felt. Refer to 100% Wool Design Felt Maintenance + Cleaning for detailed care instructions.
Variation	Wool felt is a natural material and color variation and inclusions of natural fiber on the surface are evidence of the 100% natural origin of the material. Product color is only indicative, as it is not possible to assure consistency of color in a natural product due to the natural color of raw wool and absorption of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.
Environmental	100% Wool Design Felt is 100% biodegradable/compostable and Cork Composite Backing is 93% pre-consumer recycled content Contains no formaldehyde, low VOC, no chemical irritants, and free of harmful substances Contributes to LEED© Download Declare Label Living Building Challenge Criteria Compliant Oeko-Tex© Standard 100 Certified Product Class II (100% Wool Design Felt) Cork Composite Backing is repurposed FSC Certified cork cutoffs from bottle stopper production Meets VOC test limits for the CDPH v1.2 method
Acoustics	Standard Cork Backing: ASTM C 423: NRC – 0.20, SAA – 0.21 Custom Akustika Backing: ASTM C 423: NRC – 0.50, SAA – 0.51
Colorfastness to Light	Class 4-5 (40 hours)
Colorfastness to Crocking	Class 3-4 (wet), Class 4-5 (dry)
Flammability	Test reports available upon request



## **Standard Colors**

