



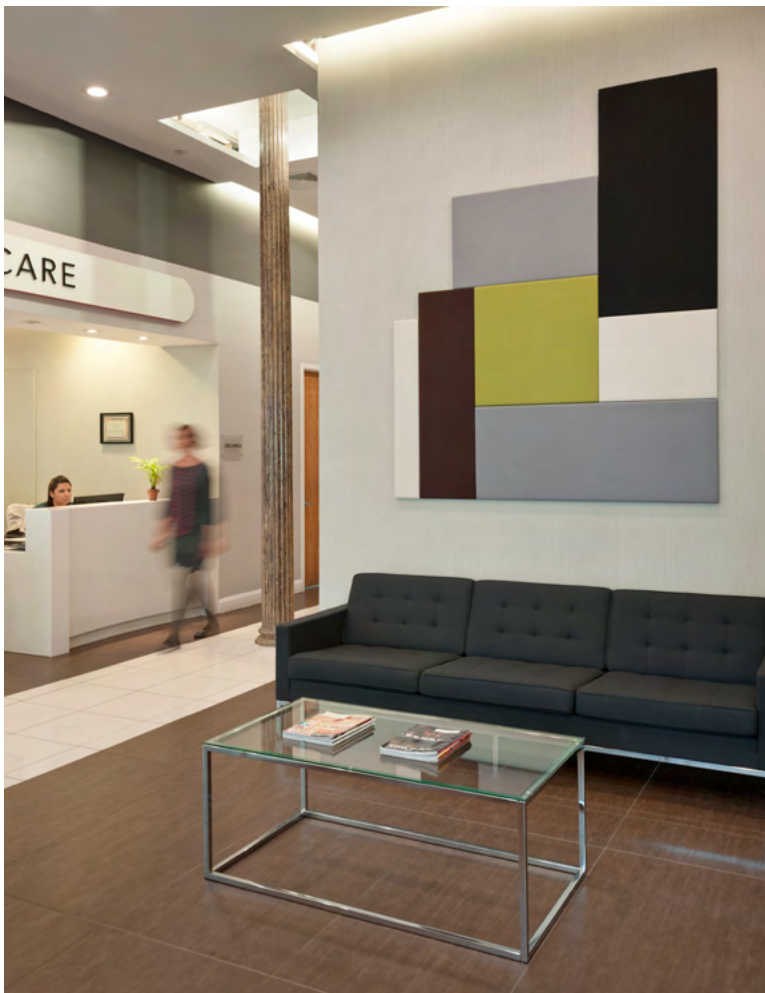

filzfelt

Muro

About

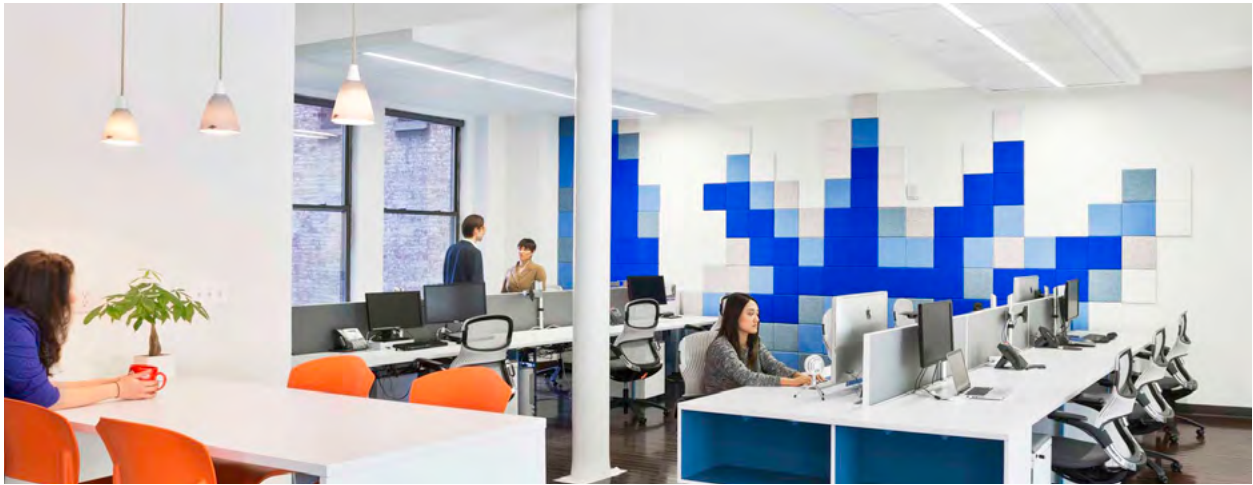

Muro adds softness, texture and color to any space with these flexible wall panels that come pre-installed with Z-Clip fasteners for easy hanging.

Specifications

Name	Muro
Panel Thickness	7/8 in (2.2 cm) Note: Z-Clips adds an additional 3/16 in (0.95 cm) to thickness
Standard Sizes	Minimum: 1'-0" x 1'-6" (30.5 x 45.7 cm) Maximum: 4'-0" x 4'-0" (121.9 x 121.9 cm)
Durability	Contract or residential
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the surface appearance of the felt. Refer to 100% Wool Design Felt Maintenance + Cleaning for detailed care instructions.
Lead Time	Made to order and certain lead times will apply
Environmental	100% Wool Design Felt is 100% biodegradable, contains no formaldehyde, 100% VOC free, no chemical irritants, free of harmful substances, Oeko-Tex® Standard 100 Certified Product Class II 100% Wool Design Felt contributes to LEED® v4
Installation	Installs with preinstalled Z-Clip fasteners for easy hanging. The Z-Clips provided are 6 ft (1.8 m) in length and can be cut to fit according to site requirements. FilzFelt is able to provide installation services; however, application is basic and can be provided by a reputable general contractor.
Custom	Sizes beyond the minimum and maximum sizes must be quoted
Acoustic	For a wall panel option with acoustic properties, please refer to Akustika 10 Wall.
Variation	Wool felt is a natural material and color variation and inclusions of natural fiber on the surface are evidence of the 100% natural origin of the material. Product color is only indicative, as it is not possible to assure consistency of color in a natural product due to the natural color of raw wool and absorption of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.
Colorfastness to Light	Class 4–5 (40 hours)
Colorfastness to Crocking	Class 3–4 (wet), Class 4-5 (dry)
Environmental	Oeko-Tex® Standard 100 Certified Product Class II (100% Wool Design)
Flammability	Test reports available upon request

Standard Colors

