



Plectere Aline throws other hanging dividers for a loop.


This semi-transparent wool felt panel features a series of knots and loops to up the space division game. Available in three standard sizes as well as custom sizes, Plectere Aline divides space while providing openness and allowing light through. Thin cables keep suspension hardware to a minimum and mount to the ceiling with adjustable cable grippers that make for uncomplicated installation.

Plectere Aline was designed by Petra Vonk, a designer who joins technology with craft through concepts and applications that experiment with transparency through repetition in abstract patterns.

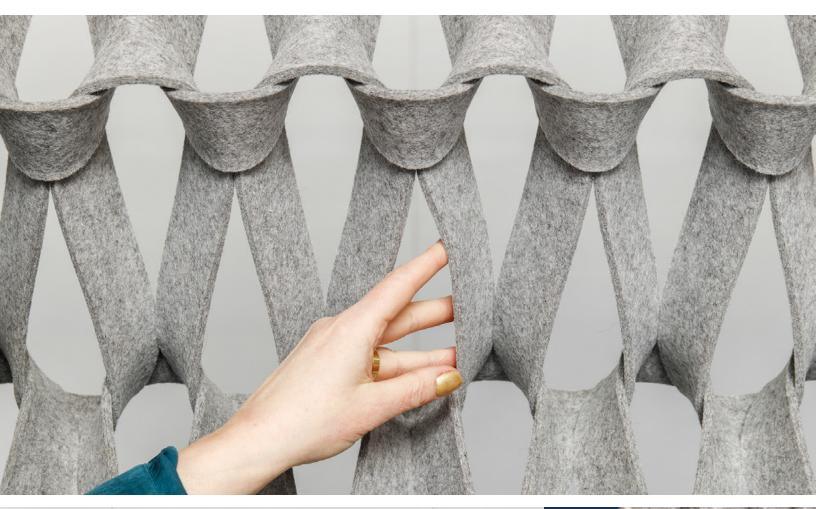

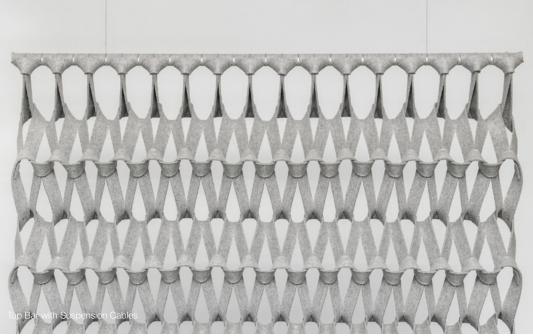



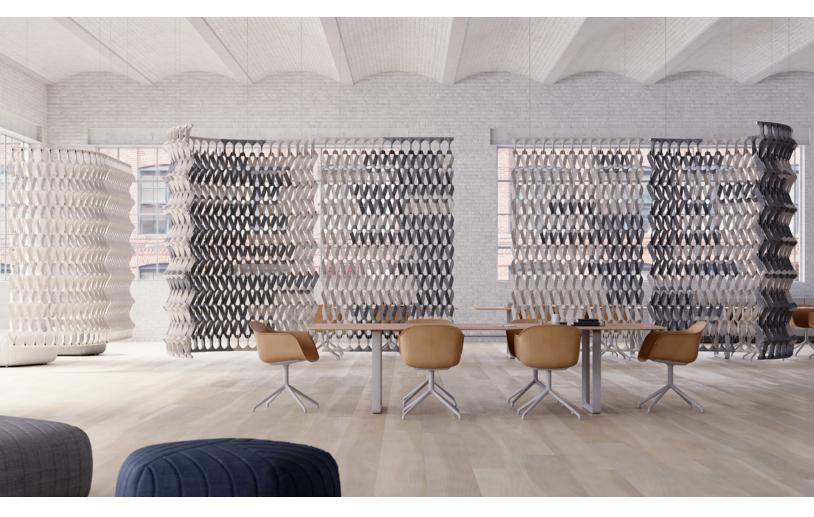





Aline and Curve play nice for endless, effortless configurations. By combining Plectere Aline and Plectere Curve, defining the spaces you need is as easy as pie. Hang these soft braided panels to define a corridor, create head's down work nooks, or simply break up a large room. Allow multiple panels to undulate through a space or hang them individually to create a custom space plan that goes up in no time flat.



"I look for inspiration first and foremost in knitting techniques and, of course, in materials. I am very fond of materials in general and the strange combinations of uses of various materials. More than anything, I like to make knitting with atypical materials. This is how Plectere developed."

- Petra Vonk, designer of Plectere Aline

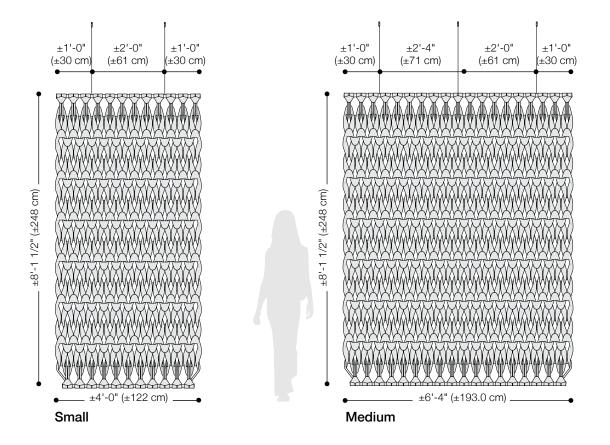

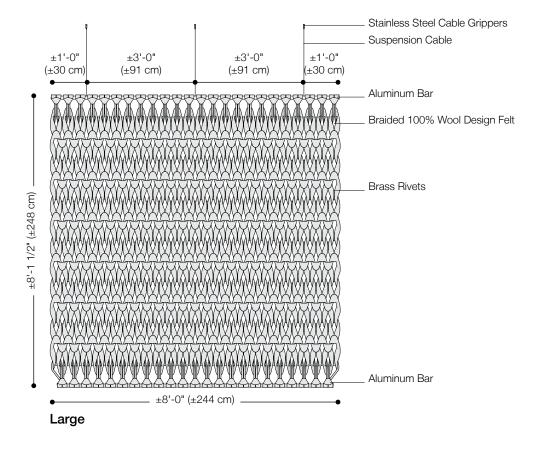

Product	Plectere Aline
Designer	Petra Vonk
Content	100% Wool Design Felt
Panel Sizes	Small: ±4'-0" x 8'-1 1/2" (±122 x 248 cm)
	Medium: ±6'-4" x 8'-1 1/2" (±193 x 248 cm)
	Large: ±8'-0" x 8'-1 1/2" (±244 x 248 cm)
Thickness	±6 in (±15 cm)
Size Tolerance	Plectere is made of natural wool felt and braided by hand so sizes may vary ± 2 in (± 5 cm) in width and ± 2 –4 in (± 5 –10 cm) in length
Colors	1-Color per panel
Hardware Finishes	Brass rivets secure the strips on the left and right sides
	Top and bottom bars are satin anodized aluminum
Suspension Points	Two to four suspension points per panel
Custom	Custom sizes available between minimum of 20 sq ft (1.9 sq m) and maximum of ±11'-0" x 11'-6"
	(±335 x 351 cm)—please refer to Plectere Aline Custom Size Matrix for available sizes 2-Color to 4-Color panels are available and must be quoted
 Durability	Contract or residential
Lead Time	Made to order and certain lead times will apply
Installation	Install with two to four suspension drops included per panel with cable grippers that mount to ceiling and allow height adjustment. Suspension cables come in 3'-0" (91.4 cm) length and additional length is
	available for an upcharge. Actual ceiling connection depends upon ceiling type and ceiling fasteners not included.
Recommended Distance Above Floor	8 in (20 cm)
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap
	and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the
	surface appearance of the felt. Refer to Product Maintenance + Cleaning for detailed care instructions.
Variation	Wool felt is a natural material and color variation and inclusions of natural fiber on the surface are evidence of the 100% natural origin of the material. Product color is only indicative, as it is not possible
	to assure consistency of color in a natural product due to the natural color of raw wool and absorption
	of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced
	beyond the normal commercial range. In addition, variations in temperature and humidity can expand or contract the fibers affecting the size and shape of the felt. Please note that dimensions may change ±2 in
	(± 5 cm) in width and $\pm 2-4$ in ($\pm 5-10$ cm) in length due to climate variation.
Environmental	100% biodegradable/compostable, contains no formaldehyde, 100% VOC free, no chemical irritants,
	and free of harmful substances
	Contributes to LEED [®] Download Declare Label
	Living Building Challenge Criteria Compliant
	Oeko-Tex Standard 100 Certified Product Class II
	Meets VOC test limits for the CDPH v1.2 method
Acoustics	ASTM C 423: NRC – 0.20, SAA – 0.23
Colorfastness to Light	Class 4–5 (40 hours)
Colorfastness to Crocking	Class 3-4 (wet), Class 4-5 (dry)
Flammability	Test reports available upon request



Standard Colors

