



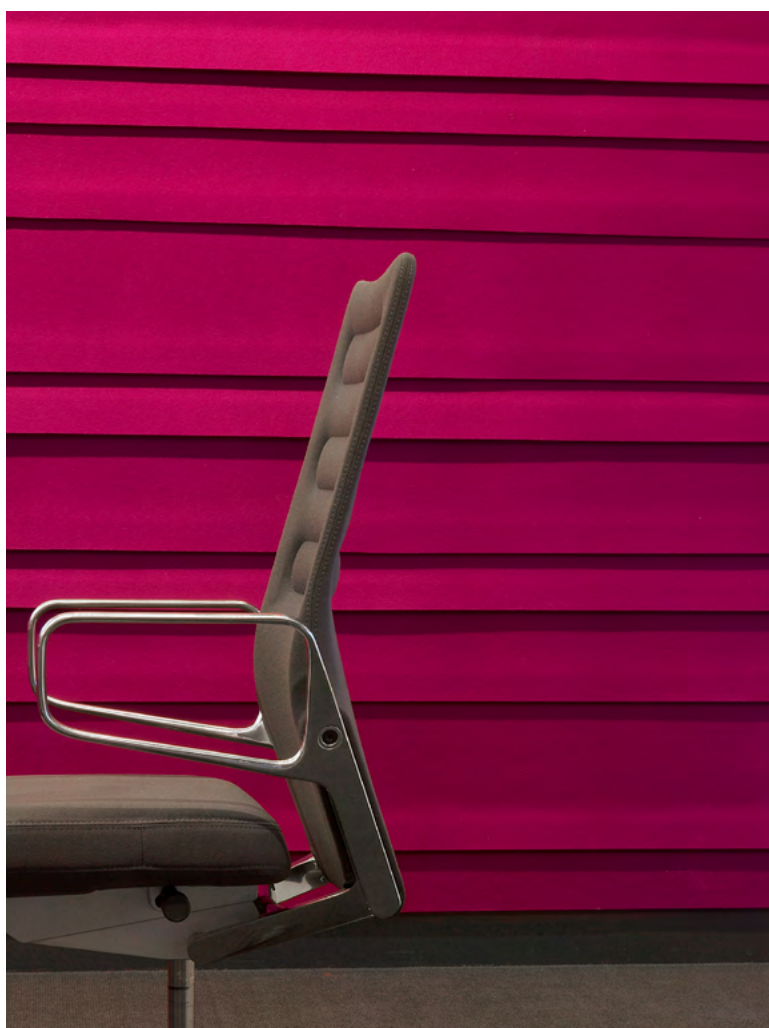

Roll Cut Wool Design Felt

About

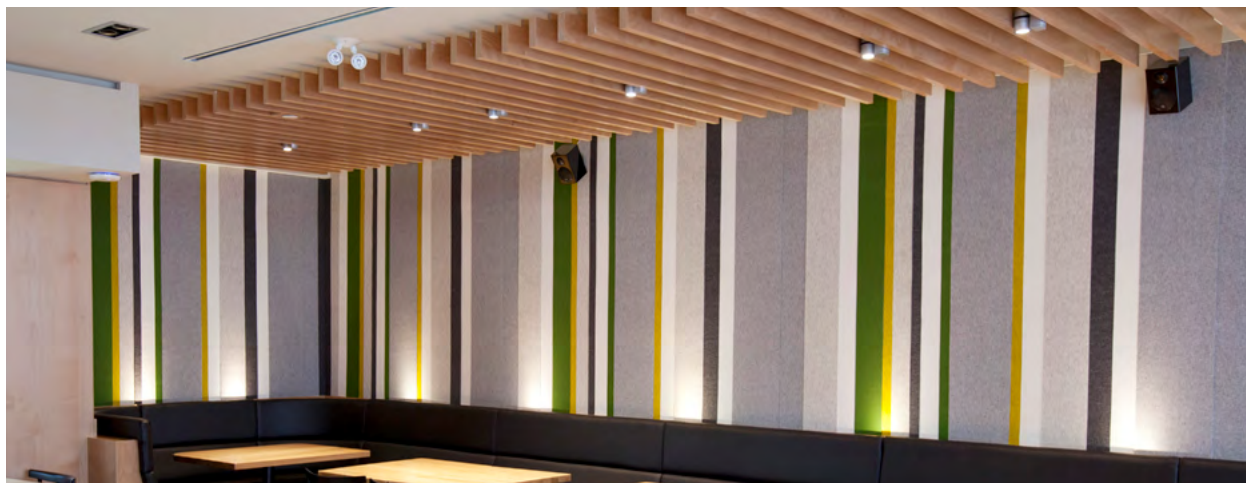

A bolt of 100% Wool Design Felt may be sliced into full length strips that can vary in width. Only full bolts may be purchased and please note that lengths are not finished cuts. Roll cut Wool Design Felt may be a more economical solution for custom wallcovering or architectural installations.

Specifications

Content	100% Wool Design Felt
Felt Thickness	2 mm (1/16 in), 3 mm (1/8 in), 5 mm (3/16 in), 8 mm (5/16 in), or 10 mm (3/8 in)
Minimum	1 bolt
Minimum Strip Width	1 in (2.5 cm)
Maximum Strip Width	2mm, 3mm or 5mm: 69 in (175 cm) 8mm or 10mm: 60 in (155 cm)
Approx. Bolt Length	2mm, 3mm or 5mm: 24 lin yd (20 lin m) 8mm or 10mm: 17 lin yd (15 lin m)
Durability	Contract or residential
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the surface appearance of the felt. Refer to 100% Wool Design Felt Maintenance + Cleaning for detailed care instructions.
Lead Time	Cut to order and certain lead times will apply
Environmental	100% biodegradable, contains no formaldehyde, 100% VOC free, no chemical irritants, free of harmful substances Contributes to LEED® v4
Variation	Wool felt is a natural material and color variation and inclusions of natural fiber on the surface are evidence of the 100% natural origin of the material. Product color is only indicative, as it is not possible to assure consistency of color in a natural product due to the natural color of raw wool and absorption of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. In addition, variations in temperature and humidity can expand or contract the fibers affecting the size and shape of the felt. Please note that the material dimensions may change up to ±5% due to climate variation.
Colorfastness to Light	Class 4–5 (40 hours)
Colorfastness to Crocking	Class 3–4 (wet), Class 4–5 (dry)
Environmental	Oeko-Tex® Standard 100 Certified Product Class II
Flammability	Varies by thickness
Standard Colors	Refer to filzfelt.com for available colors