

Scale Installation Instructions


These installation recommendations consist of common-sense practices. Installers should rely upon their own professional experience and understanding of their unique requirements to be the best guide to a successful installation.

Tools Needed

- 1 Bar level or laser level
- 2 Chalk line
- 3 Drill
- 4 Wall screws or heavy-duty anchors
- 5 Tape measure or yard stick


Components Provided

Modules are provided as indicated on the FilzFelt shop drawing.


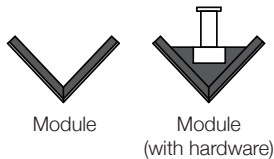


Installation Instructions

- 1 Refer to FilzFelt shop drawing to use as a guide for attachment point placement.
- 2 Disconnect metal attachment hardware from hardware modules by pulling on the sleeve. Set aside for step 7.
- 3 Modules connect by inserting the bottom left-hand slot into the top right-hand slot of a second module and bottom right-hand slot into the top left-hand slot of a third module.
- 4 Assemble a section of tiles from the lower left or right corner comprising of at least four attachment points (20–30 modules for Small Scale / 10–15 modules for Large Scale). End the initial section on an angle to allow additional pieces to be added.
- 5 Flip the assembled section over and on a smooth flat surface measure the distance both horizontally (x) and vertically (y) between attachment point centers. Attachment point spacing and quantity will vary based on wall size and design.

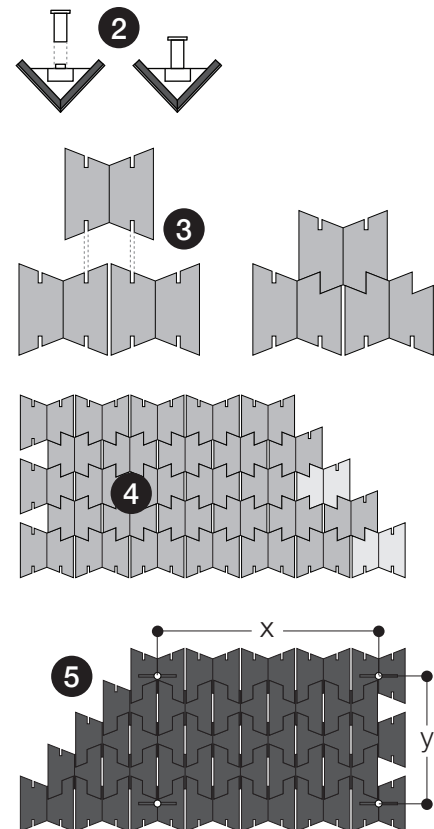

- 6 Transfer measurement to the wall, creating a grid of attachment point locations.
- 7 Install attachment hardware base plate to wall utilizing anchors at each point and then thread on attachment point barrel.
- 8 Install assembled section onto wall hardware. Use the pre-assembled section as a base to add individual scale pieces to complete the wall installation.

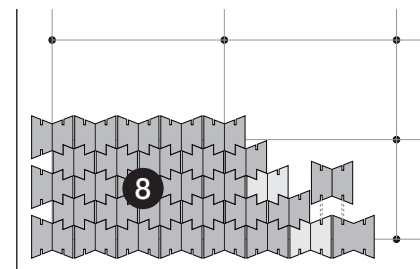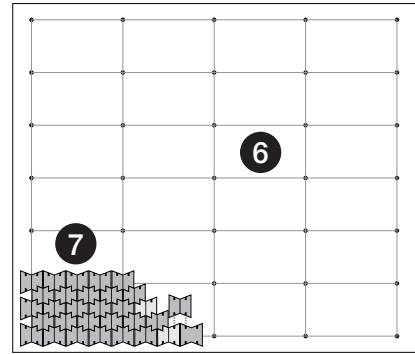

Cleaning Instructions

Like any natural fiber, a minimal approach should always be taken to clean wool felt since the cleaning method could potentially do more damage than the stain. In this order, the cleaning approach should be: dusting with a roller, vacuuming with a clean soft brush, water and mild detergent, chemical spot remover. If a chemical spot remover is required, test first in an inconspicuous area.

Where wool felt is used as a wall and ceiling application, periodic spot removal of lint can be achieved easily by using a standard masking tape lint roller. It is always a good idea to use the lint roller first in any area intended to be spot cleaned. Once per year, it is recommended that the entire surface be given a light vacuum with a soft horsehair upholstery brush. In a clean office environment, it may not be necessary to do this annually.

For removal of minor stains, a mild enzyme-based detergent (such as Tide Free) is recommended. Create a dilute solution by adding three parts water to one part detergent in a clean container. Use a clean paper towel to gently blot the detergent into the stain. Press and release, press and release. Using a separate container of just clear water, use clean moist paper towels to blot more water into the stain. Press and release, press and release. Finish by blotting firmly with clean, dry paper towels until the area is nearly dry.

There are many solvent-based spot removers available. Although they are not recommended except in the case of emergency, the best choices for wool felt are dry cleaning fluids. Be sure to test in an inconspicuous area first. Blot the stained area with a clean cloth soaked in dry cleaning fluid, then blot with clean cloth until dry.