

Spindle Block keeps things bobbin' along.

Based on Eva Zeisel's 'Bellybutton' Space Dividers designed in 1958 for Mancioli in Montelupo, Italy, the sculptural acoustic tiles create a repetition of curved forms are evocative of the whimsical screen. Available in over ninety colors of 100% Wool Design Felt mounted to a high-performing acoustic substrate, the modular tiles install easily with heavy-duty construction adhesive while providing sound absorption and natural texture.

Spindle Block was designed by Eva Zeisel, a modernist ceramicist, designer, and "a maker of useful things."














"To describe our profession as designers, we are actually concerned with the playful search for beauty. The word 'playful' is a necessary aspect of our work because one of our problems is that we have to make and produce lovely things all throughout life. Playful is therefore an important part of our quality as designers."

- Eva Zeisel, designer of Spindle Block

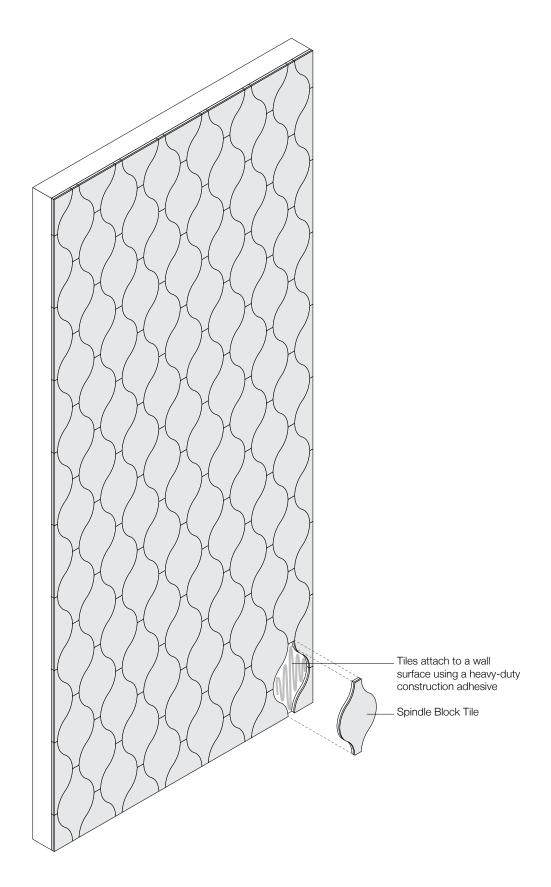


Exploded Axonometric







2-Color Pattern Code: FF-EZ-SPIN-001

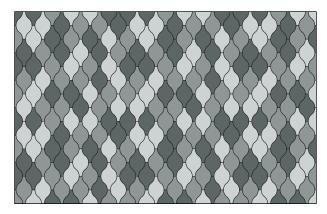

3-Color Pattern 1 Code: FF-EZ-SPIN-002

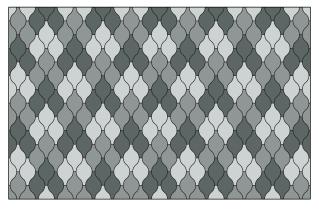

3-Color Pattern 2 Code: FF-EZ-SPIN-003

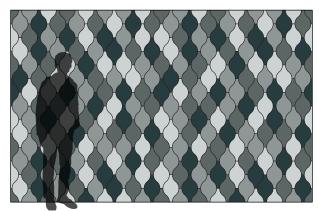

4-Color Pattern Code: FF-EZ-SPIN-004

Product	Spindle Block
Designer	Eva Zeisel
Content	100% Wool Design Felt + Akustika 10 Substrate (60% post-consumer recycled content)
Tile Size	1'-0" x 7 3/4" (30.5 x 17.8 cm)
Thickness	1/2 in (13 mm)
Thickness Tolerance	1'-0" x 7 3/4" (30.5 x 17.8 cm)
Edges	Standard
Color Options	1-Color, 2-Color, 3-Color, or 4-Color per wall
Design Tool	A Design Tool is available to assist in the design of Block tiles. This tool allows patterns to be configured and is available at: dt.filzfelt.com
Custom	Custom sizes, shapes, and mounting options are available and must be quoted Tiles in 5/8 in (15 mm) thickness available with a 10% upcharge 5-Color or more per wall is available and must be quoted
Durability	Contract or residential
Lead Time	Made to order and certain lead times will apply
Installation	Install in the pattern as specified and attach to a wall surface using a heavy-duty construction adhesive.
	Tiles may be trimmed to size with a utility knife. Refer to Spindle Block Installation Instructions for complete guidance.
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the surface appearance of the felt. Refer to Product Maintenance + Cleaning for detailed care instructions.
Variation	Wool felt is a natural material and color variation and inclusions of natural fiber on the surface are
	evidence of the 100% natural origin of the material. Product color is only indicative, as it is not possible to assure consistency of color in a natural product due to the natural color of raw wool and absorption of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.
Environmental	to assure consistency of color in a natural product due to the natural color of raw wool and absorption of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced
Environmental Acoustics	to assure consistency of color in a natural product due to the natural color of raw wool and absorption of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. 100% Wool Design Felt is 100% biodegradable/compostable and Akustika 10 contains minimum 60% post-consumer recycled content and is 100% recyclable Contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances 100% Wool Design Felt and Akustika 10 contribute to LEED© Download Declare Label Living Building Challenge Criteria Compliant Oeko-Tex© Standard 100 Certified Product Class II (100% Wool Design Felt + Akustika 10 Substrate)
	to assure consistency of color in a natural product due to the natural color of raw wool and absorption of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. 100% Wool Design Felt is 100% biodegradable/compostable and Akustika 10 contains minimum 60% post-consumer recycled content and is 100% recyclable Contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances 100% Wool Design Felt and Akustika 10 contribute to LEED© Download Declare Label Living Building Challenge Criteria Compliant Oeko-Tex© Standard 100 Certified Product Class II (100% Wool Design Felt + Akustika 10 Substrate) Meets VOC test limits for the CDPH v1.2 method
Acoustics	to assure consistency of color in a natural product due to the natural color of raw wool and absorption of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. 100% Wool Design Felt is 100% biodegradable/compostable and Akustika 10 contains minimum 60% post-consumer recycled content and is 100% recyclable Contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances 100% Wool Design Felt and Akustika 10 contribute to LEED© Download Declare Label Living Building Challenge Criteria Compliant Oeko-Tex© Standard 100 Certified Product Class II (100% Wool Design Felt + Akustika 10 Substrate) Meets VOC test limits for the CDPH v1.2 method ASTM C 423: NRC – 0.50, SAA – 0.51
Acoustics Colorfastness to Light	to assure consistency of color in a natural product due to the natural color of raw wool and absorption of dyes. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range. 100% Wool Design Felt is 100% biodegradable/compostable and Akustika 10 contains minimum 60% post-consumer recycled content and is 100% recyclable Contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances 100% Wool Design Felt and Akustika 10 contribute to LEED© Download Declare Label Living Building Challenge Criteria Compliant Oeko-Tex© Standard 100 Certified Product Class II (100% Wool Design Felt + Akustika 10 Substrate) Meets VOC test limits for the CDPH v1.2 method ASTM C 423: NRC – 0.50, SAA – 0.51 Class 4–5 (40 hours)



Standard Colors

100% Wool Design Felt



Akustika 10 Substrate

