





Imprint is a down-to-earth wallcovering.

Imprint is an acoustic wallcovering system that features a seemingly random pattern that delivers big-time texture. This wallcovering composed of easy-to-install two feet by one foot tiles was inspired by the pitted limestone along the hiking trails in the designer's native New Mexico. Available in over ninety colors of natural 100% Wool Design Felt on a cork backing, Imprint provides a Noise Reduction Coefficient (NRC) of 0.35 to work its sound-softening magic in any space.

Imprint was designed by Submaterial, a design studio and manufacturer based in Albuquerque, New Mexico.




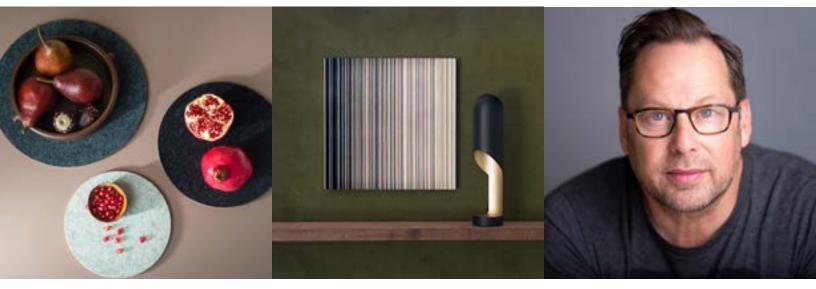

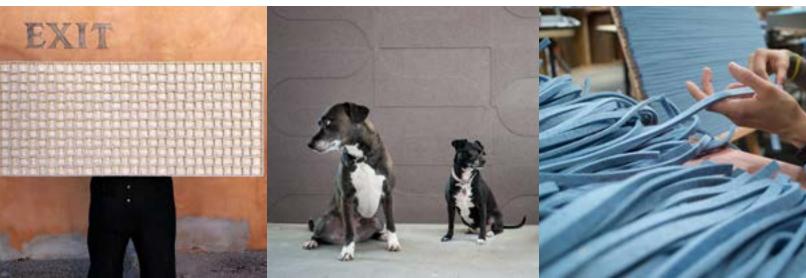

"With many of the surfaces and textures I explore, I believe I am striving to create a balance between simple geometries and complex natural systems. I have always been fascinated by the appearance of randomness, especially when it turns out to be driven by a complex and quite orderly set of rules."

- David Hamlin with Submaterial, designer of Imprint

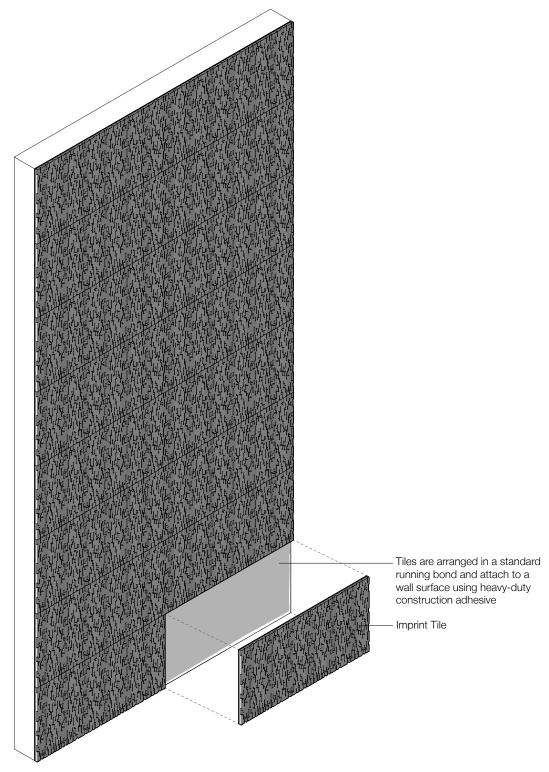

**Exploded Axonometric** 

Product	Imprint
Designer	Submaterial
Content	100% Wool Design Felt + Cork Composite Backing
Tile Size	2'-0" x 1'-0" (61.0 x 30.5 cm)
Thickness	1/2 in (12.5 mm)
Colors	1-Color per wall
Stocking Program	Stocking Program colors are available in 1-Color option only and ship within three business days from receipt of valid purchase order, subject to inventory availability and payment terms. Standard Colors are made to order and certain lead times will apply.
Trim Option	End-of-Run Trim
Custom	2-Color or more per wall is available and must be quoted
	Akustika backing available to achieve NRC rating of 0.56
Durability	Contract or residential
Lead Time	With the exception of Stocking Program Colors, tiles are made to order and certain lead times will apply
Installation	Install in a running bond pattern and attach to a wall surface using a heavy-duty construction adhesive.  Tiles may be trimmed to size with a utility knife. For wall-to-wall installations, add 15% overage. Refer to Imprint Installation Instructions for complete guidance.v
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water. Avoid aggressive rubbing as this can continue the felting process and change the surface appearance of the felt. Refer to Product Maintenance + Cleaning for detailed care instructions.
Variation	Wool felt is a natural material and color variation and inclusions of natural fiber on the surface are evidence of the 100% natural origin of the material. Since Imprint is constructed with felt strips turned on edge, color variation will be more extreme and is part of the design intent of the product. Shade variation will be very noticeable on the installed product and cannot be more uniform.
Environmental	100% Wool Design Felt is 100% biodegradable/compostable and Cork Composite Backing is 93% preconsumer recycled content Contains no formaldehyde, low VOC, no chemical irritants, and free of harmful substances Contributes to LEED© Download Declare Label Living Building Challenge Criteria Compliant Oeko-Tex© Standard 100 Certified Product Class II (100% Wool Design Felt) Forest Stewardship Council® Certified (Cork Composite Backing) Meets VOC test limits for the CDPH v1.2 method
Acoustics	Standard Cork Backing: ASTM C 423: NRC – 0.37, SAA – 0.35 Custom Akustika Backing: ASTM C 423: NRC – 0.56, SAA – 0.55
Colorfastness to Light	Class 4–5 (40 hours)
Colorfastness to Crocking	Class 3-4 (wet), Class 4-5 (dry)
Flammability	Test reports available upon request



## **Colors**

## Stocking Program Colors



## Standard Colors



426 Schwarz

300 Anthrazit