Scale Installation Instructions

These installation recommendations consist of common-sense practices for installing wall panels and similar products. Installers should rely upon their own professional experience and understanding of their unique requirements to be the best guide to a successful installation. To view a video of an installation, please visit vimeo.com/filzfelt/scale.

Tools Needed

Bar level or laser level

Chalk line

Drill

Wall screws or heavy-duty anchors

Tape measure or yard stick

Components Provided

Modules (as ordered)






Module (without hardware)

(with hardware)


Panel Map

Installation Instructions

- Inspect the product. Subtle color and texture variations even within the same Tile are a normal aspect of this product. It is advisable to inspect for these irregularities and plan the layout accordingly, making sure to disperse any minor color variation evenly. In the case of product defect or damage in transit, FilzFelt must be notified within five (5) business days. FilzFelt cannot accept a return or warranty claim on any product that has been installed.
- 2 Allow components to acclimate to the installation environment. After the shipping crates have been opened, the panels should be laid out individually on the floor for at least forty-eight (48) hours.
- While the modules are becoming acclimatized, clean the work surface. It should be smooth, dry, and dust-free to allow the best possible installation. A Level 4 Finish wall preparation is sufficient.
- 4 Refer to Shop Drawings to use as a guide for attachment point placement.
- 5 Disconnect metal attachment hardware from hardware modules by pulling on the sleeve. Set aside for step 7.
- 6 Modules connect by inserting the bottom left-hand slot into the top right-hand slot of a second module and bottom right-hand slot into the top left-hand slot of a third module.
- 7 Assemble a section of tiles from the lower left or right corner comprising of at least four (4) attachment points (20–30 modules for Small Scale / 10–15 modules for Large Scale). End the initial section on an angle to allow additional pieces to be added.
- 8 Flip the assembled section over and on a smooth flat surface measure the distance both horizontally (x) and vertically (y) between attachment point centers. Attachment point spacing and quantity will vary based on wall size and design.

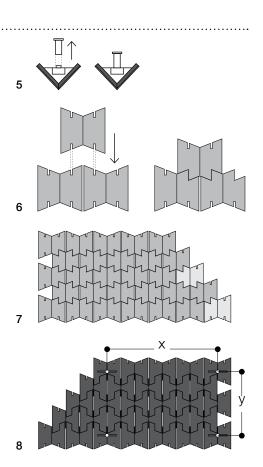

- **9** Transfer measurement to the wall, creating a grid of attachment point locations.
- 10 Install attachment hardware base plate to wall utilizing anchors at each point and then thread on attachment point barrel.
- 11 Install assembled section onto wall hardware. Use the pre-assembled section as a base to add individual scale pieces to complete the wall installation.



11

Cleaning Instructions

Like any natural fiber, a minimal approach should always be taken to clean wool felt since the cleaning method could potentially do more harm than the soiling or stain. The cleaning approach should be (1) dust with a lint roller, (2) vacuum with a clean, soft brush, (3) clean with water and mild detergent, and (4) clean with chemical spot remover. **IMPORTANT**: Always test any cleaning method in an inconspicuous area before attempting general cleaning.

For complete instructions, refer to the Product Maintenance + Cleaning Guide at filzfelt.com/cleaning-guide.